




SECTION A-A



SECTION B-B

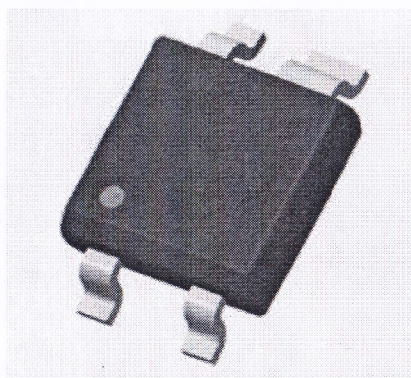

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	—	—	1.15
A1	0.05	—	0.15
A2	0.90	0.95	1.00
A3	0.35	0.40	0.45
a	0.78	—	0.86
a1	0.77	0.80	0.83
b	0.36	—	0.44
b1	0.35	0.38	0.41
c	0.15	—	0.19
c1	0.14	0.15	0.16
D	2.50	2.60	2.70
E1	2.50	2.60	2.70
E	3.80	4.00	4.20
e	1.42 BSC		
e1	0.50 BSC		
e2	0.71 BSC		
L	0.40	0.50	0.60
L1	0.70REF.		
θ	0	—	8°



				Tianshui Huatian Technology Co., LTD.	
				Title	
				SOT33-4L POD	
REV.	Description	Signature	Date	DWG No.	REF No.
				HTFj3340202	
Drafted By	CHEN Zhixiang	Verified By	QI Zhigiang		
Confirmed By	CHEN Guolang	Verified By	HE Naihui		
Verified By	HE Wenhai	Approved By	NU Dailie	Unit mm	REV. A
				Effective Date 2017/02/28	